

ALFA X

Portable Compound Radial Saw with Tabletop Ø 305 mm



PRODUCT WEB LINK



FEATURES

Used for cutting processes of aluminum, plastic and wooden materials.

- Cutting at any desired angle between -45° and +45°
- 0°, 5°, 10°, 15°, 20°, 22,5°, 25°, 30°35°, 40°, 45° right and left angle fixing
- Head with ability to tilt left between 0° and 45° (Performs tilt cutting when lower plate is at 0 [Zero] position)
- Laser Guide for accurate cuts
- Screw workpiece clamp
- Anti vibration feets
- Single-phase system

STANDARD EQUIPMENT





- Clamp

OPTIONAL EQUIPMENT


- Stand (S IID)
- Ø 305 mm saw blade
- Conveyor (K 3000)
- Brake System
- Three-phase system
- Profile gauge



WEB

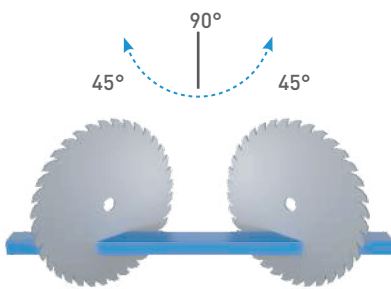

Cutting Dimensions (mm)	
90°x90°	85 x 315
45°x90°	85 x 220
90°x45°	40 x 315
45°x45°	35 x 220

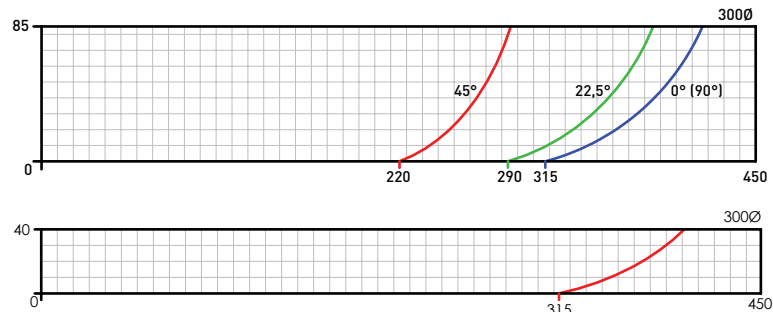

												
HP kW	n r.p.m	Hz	I (230 V) A	ø D mm	ø d mm	s mm	n r.p.m	c mm	h mm	45° mm	l x w x h (mm) kg	
1,5 1,1	3000	50 60	5	305	30-32	3,2	3000	160	40	40 x 315	570 x 1030 x 685 35,5 kg	