



Features

Used for cutting processes of aluminum, plastic and wooden materials.


- Cutting at any desired angle between -45° and +45°
- 0°, 5°, 10°, 15°, 20°, 22,5°, 25°, 30°35°, 40 , 45° right and left angle fixing
- Head with ability to tilt left between 0° and 45° (Performs tilt cutting when lower plate is at 0 (Zero) position)
- Laser Guide for accurate cuts
- Screw workpiece clamp
- Anti vibration foots

Standard Equipment


Screw workpiece clamp


Optional Equipment


- Stand
- Ø 300 mm saw blade
- Conveyor
- Brake System
- Three-phase system
- Profile gauge



| Cutting Dimensions (mm) | |
|-------------------------|----------|
| 90°x90° | 85 x 315 |
| 45°x90° | 85 x 220 |
| 90°x45° | 40 x 315 |
| 45°x45° | 35 x 220 |

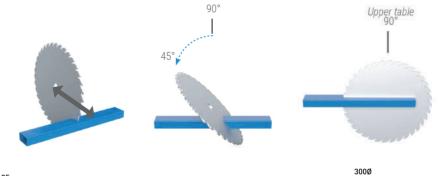

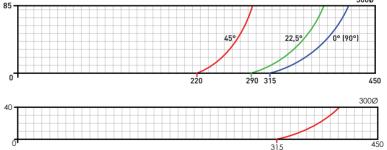

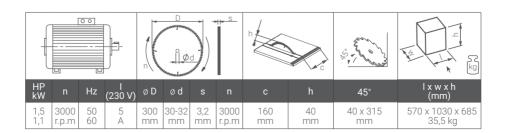

Özçelik Makina continuously improves its products and offers new and modern solutions for PVC and Aluminum Profile Processing. Accordingly, Özçelik reserves the right to change the information in this document without notice. All dimensions and weights are reference values. Valid from January 2023