



Features

Used for cutting processes of aluminum, plastic and wooden profiles.


- · Hydro-Pneumatic cutting process
- Secure cutting by the cover equipped with a safety sensor
- Cutting speed adjustment based on the profile
- Cutting at -67,5°, -45°, -30°, -22,5°, -15°, 0°, 15°, 22,5°, 30°, 45°, 67,5°
- Increase in cutting capacity with mobile miter
- · Pneumatic vertical and horizontal clamps


Standard Equipments


- Ø 600 mm saw blade
- Feeding conveyor (right)
- Cooling system
- · Compatibility with powder suction system

Optional Equipments

- Exit conveyor (left)
- Single-phase system
- Profile minimum cutting equipment
- 180° cutting



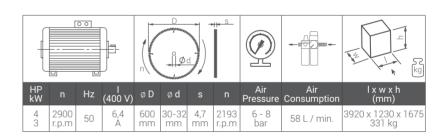

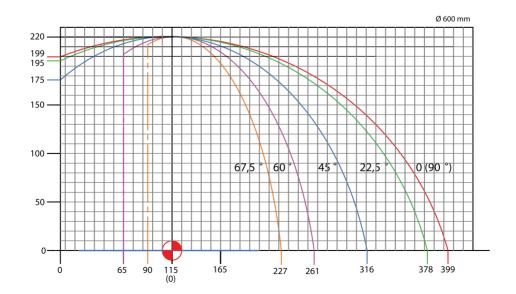

Özçelik Makina continuously improves its products and offers new and modern solutions for PVC and Aluminum Profile Processing. Accordingly, Özçelik reserves the right to change the information in this document without notice. All dimensions and weights are reference values. Valid from January 2023