



Features

Used for cutting processes of aluminum, plastic and wooden profiles.


- · Safe cutting with double spring system and saw barrier
- Cast core with impact resistance
- $\,\cdot$ Cutting at any desired angle between -45° and +45°
- Cutting at 0°, 15°, 22.5°, 30°, 45° right and left fixed angles
- Pneumatic vertical and horizontal clamps
- Hydro-Pneumatic cutting process
- · Cutting speed adjustment based on the profile


Standard Equipments


- Ø 400 mm saw blade
- Cooling system

Optional Equipments

- Conveyor
- Single-phase system

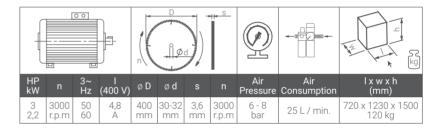





Özçelik Makina continuously improves its products and offers new and modern solutions for PVC and Aluminum Profile Processing. Accordingly, Özçelik reserves the right to change the information in this document without notice. All dimensions and weights are reference values. Valid from January 2023