## PRODUCT WEB LINK



## **FEATURES**

Used for cutting processes of aluminum, plastic and wooden materials.

- Safe cutting with double spring system and saw barrier
- Ability to cut on the upper table
- Cutting at any desired angle between -45° and +45°
  Head with ability to tilt left between 0° and 45° (Performs tilt cutting when lower plate is at 0 (Zero) position)
- 0°, 15°, 22.5°, 30°, 45° right and left angle fixing

## STANDARD EQUIPMENT


Clamp


## **OPTIONAL EQUIPMENT**


- Profile gauge
- Ø 305 mm saw blade
- Second clamp
- Conveyor
- Stand
- Brake System
- Three-phase system





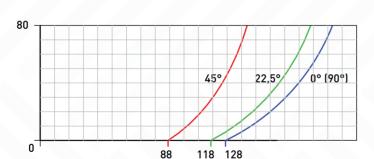









	00		n		S	E STORY TO	h	<b>₩</b>	SZ kg
						450			
HP kW	Hz	(230 V)	ø D	ø d		45° a x b		h	l x w x h (mm)